
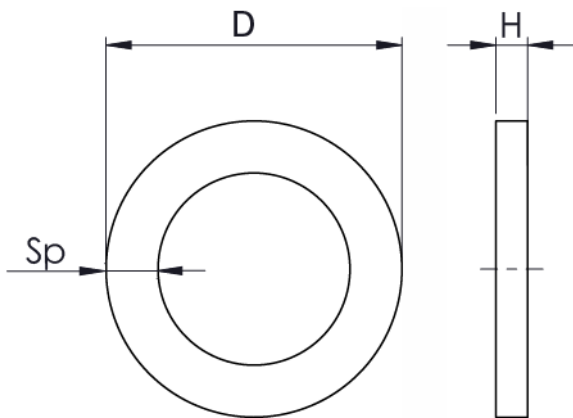


<b>Description:</b>	Gasket AFM34
<b>Part.#:</b>	see table below
<b>Material:</b>	AFM34
<b>Operating temperature:</b>	-40°C to 200°C (Liquids up to 250°C)
<b>Manufacturer:</b>	EUROTIS
<b>Customs code:</b>	84849000
<b>Country of origin:</b>	IT
<b>REACH, ROHS, Building Products Regulations:</b>	Not applicable
<b>DVGW certified uses:</b>	 Gas, drinking water, solar and heating

Part.#	GTIN	DN	D (mm)	Sp (mm)	H (mm)	Weight (kg/10 Pce.)
<b>ED12</b>	4250289301671	12	18,5	3,25	2	0,007
<b>ED15</b>	4250289301688	15	24,0	4,00	2	0,011
<b>ED20</b>	4250289301695	20	30,0	5,00	2	0,016
<b>ED25</b>	4250289301701	25	38,5	6,75	2	0,026



## Further Resources

<b>Technical Information EUROTIS CSST:</b>	<a href="http://wiki.leifeld.de">http://wiki.leifeld.de</a>
<b>Leifeld Order system:</b>	<a href="https://www.leifeld.de">https://www.leifeld.de</a> - Menu „Catalogue – Order system“
<b>Product usage:</b>	<a href="https://www.leifeld.de">https://www.leifeld.de</a> - Menu „Support“
<b>Product film:</b>	<a href="http://produkt.leifeld.de/film6-EN.htm">http://produkt.leifeld.de/film6-EN.htm</a>