


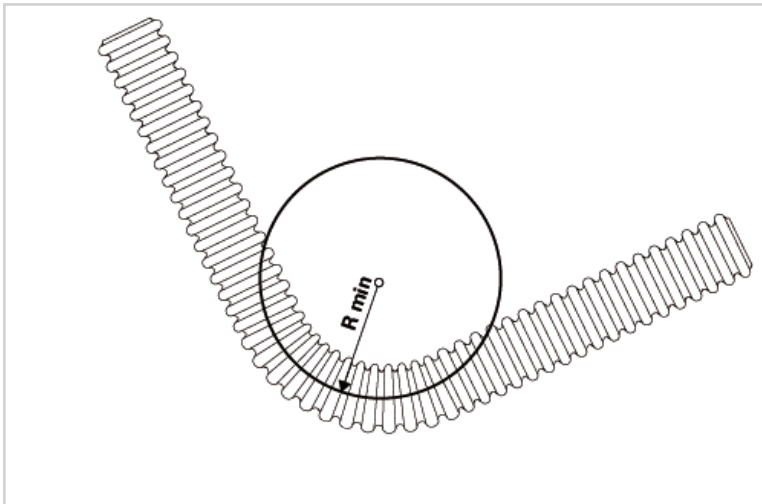


Description:	EUROTIS CSST, authorised for use with drinking water, gas, solar and heating applications. DVGW: Drinking water GW 354 (15 bar) DVGW: Gas VP 616 (100 mbar)
Part.#:	see table below
Material:	Austenitic CSST, Material No. 1.4404 to EN 10088/2 . AISI 316L, with 0,5mm LDPE yellow protective coating
Operating temperature:	-40°C to 100°C
Manufacturer:	EUROTIS
Customs code:	83071000
Country of origin:	IT
REACH, ROHS, Building Products Regulations:	Not applicable
UBA-Positive list:	Approved for use with drinking water.
DVGW certified uses:	    Gas, drinking water, solar and heating

Part.#	GTIN	DN	OD (mm)	ID (mm)	Wall thickness (mm)	Water volume (l/lm)	Inner surface area (m ² /lm)	Outer surface area (m ² /lm)	Union nut thread (Inch)	Length (m)	Weight (kg)
EG1205	4250289301329	12	15,8	12,0	0,3	0,150	0,0540	0,0568	1/2"	5	0,6
EG1210	4250289301336									10	1,2
EG1225	4250289301343									25	3,0
EG1250	4250289303378									50	9,0
EG1505	4250289301367	15	20,0	15,8	0,3	0,248	0,0702	0,0730	3/4"	5	0,9
EG1510	4250289301374									10	1,8
EG1525	4250289301381									25	6,0
EG1550	4250289303385									50	11,5
EG2005	4250289301404	20	25,0	19,7	0,3	0,383	0,0912	0,0942	1"	5	1,2
EG2010	4250289301411									10	2,2
EG2025	4250289301428									25	5,5
EG2050	4250289303392									50	11,0
EG2505	4250289301442	25	33,0	26,5	0,3	0,700	0,1313	0,1345	1.1/4"	5	1,6
EG2510	4250289301459									10	3,2
EG2525	4250289301466									25	8,0
EG2550	4250289303408									50	16,0

Max. Operating Pressure


-40°C to 150°C	15,0 bar
200°C	14,0 bar
250°C	13,0 bar




Dimension (DN)	Min. Bending radius (R min)
12	25 mm
15	25 mm
20	30 mm
25	45 mm

CSST Protective Sleeve

Part.	GTIN	DN
EGS12	4250289301718	12
EGS15	4250289301725	15
EGS20	4250289301732	20
EGS25	4250289301749	25



Fitting

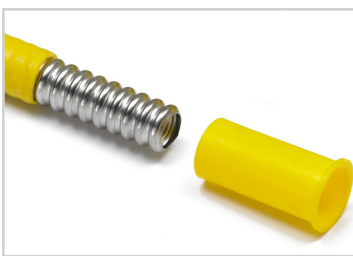

Remove the last 9 corrugations of the plastic protection with a sharp knife.



Slide the sleeve and the nut over the pipe and create the flange.



After fitting a sealing washer and tightening the nut onto the opposing fitting, slide the protective sleeve forward to protect the bare pipe.

Further Resources

Technical Information EUROTIS CSST:	http://wiki.leifeld.de
Leifeld Order system:	https://www.leifeld.de - Menu „Catalogue – Order system“
Product usage:	https://www.leifeld.de - Menu „Support“
Product film:	http://produkt.leifeld.de/film6-EN.htm