
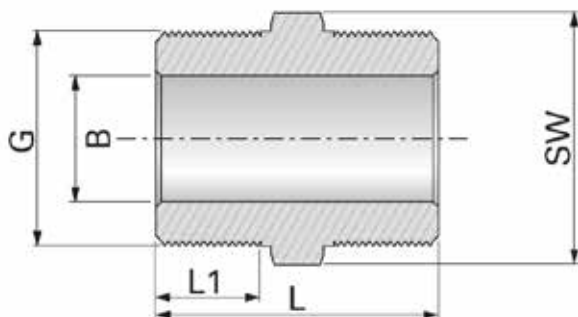


<b>Description:</b>	Connection Nipple, o-ring sealing
<b>Part.#:</b>	see table below
<b>Material:</b>	dezincification resistant brass (CW617N)
<b>Thread:</b>	DIN 259 ISO 228 G (BSP Whitworth cylindrical)
<b>Operating temperature:</b>	Max. 250°C
<b>Manufacturer:</b>	LEIFELD
<b>Customs code:</b>	74122000
<b>Country of origin:</b>	IT
<b>REACH, ROHS, Building Products Regulations:</b>	Not applicable
<b>UBA Positive List:</b>	Not approved for use with drinking water
<b>DVGW certified uses:</b>	 Solar and heating

Part.#	GTIN	DN	G (Inch)	B (mm)	L (mm)	L <sup>1</sup> (mm)	SW (mm)	Weight (kg/Pce.)
ENR12	4250289303330	12	G 1/2	14,0	31,0	10,5	24	0,07
ENR15	4250289303347	15	G 3/4	18,2	33,0	10,5	27	0,10
ENR20	4250289303354	20	G 1	20,0	40,5	13,0	34	0,20
ENR25	4250289303361	25	G 1.1/4	25,0	47,5	15,0	42	0,36
ENR32	4250289304573	32	G 1.1/2	42,0	51,5	17,0	48	0,40
ENR40	4250289303934	40	G 2	49,6	60,0	18,0	62	0,80
ENR50	4250289303941	50	G 2.1/2	62,6	64,0	20,0	76	1,16



## Further Resources

<b>Technical Information EUROTIS CSST:</b>	<a href="https://wiki.leifeld.de">https://wiki.leifeld.de</a>
<b>Leifeld Order system:</b>	<a href="https://www.leifeld.de">https://www.leifeld.de</a>
<b>Product film:</b>	<a href="https://produkt.leifeld.de/film6-EN.htm">https://produkt.leifeld.de/film6-EN.htm</a>